


MIMO-3-V2-13


ANTENNAS | MIMO-3-V2-13

3 - IN - 1 TRANSPORTATION & AUTOMOTIVE ANTENNA

2X2 LTE (MIMO), GPS/GLONASS

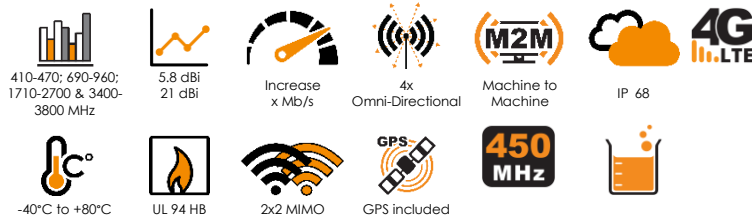

- **3-in-1 high performance multi frequency 2G/3G/4G/LTE antenna (5G Ready)**
- **2 x MiMo LTE & GPS / GLONASS**
- **Ultra-Wideband, includes 450MHz and 3.5GHz CBRS Bands**
- **Robust and water resistant (IP68) antenna**
- **Ideal for transportation & marine use**
- **Multi mounting options for easy installation**

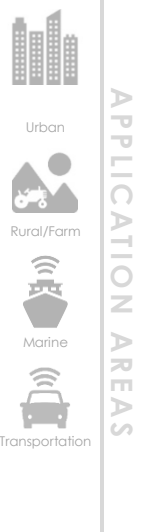

Product Overview

The MIMO-3-V2-13 consists of a 3-in-1 antenna system within a single housing, providing 2x Cellular and a GPS/GLONASS. This antenna is specifically designed for the transportation and marine industry. The 2x Cellular MIMO antennas (for 2G/3G/4G) covers the contemporary 690MHz to 2700MHz bands, as well as the new emerging LTE and 5G spectrum for 450MHz and 3.5GHz CBRS bands, which is becoming popular across the various international cellular network operators for LTE. This antenna, due to its wide band capabilities, can be used across different operators and technologies and is ready for future cellular technologies such as 5G up to 3.8GHz. The third antenna is a high-performance active GPS/GLONASS system operating down to -40 degrees. The antenna exceeds the performance of most competitors due to the attention to the design of this high-performance antenna. The radiation patterns of all radiating elements provide an excellent balance between omnidirectionality, pattern diversity and good radiation abilities at the desired elevation, which is important for this type of antenna, especially for the transportation and marine market. Main applications are for commercial/industrial vehicles, marine, M2M and other IoT systems using a wide range of radio technologies, while remaining futureproof over the wide frequency band offered by this antenna.

Features

- Ultra-wideband 410MHz to 470MHz, 690MHz to 2700MHz and 3400MHz to 3800MHz bands
- Cleverly designed decorrelated antennas give superior MIMO performance in the cellular bands
- Above features maintained from 698MHz to 5800MHz in relevant bands, including the 450MHz band
- Careful mechanical design provides ruggedness, corrosion, water, dust resistance (IP68)


Application Areas


- Transport broadband, automation and telemetry for Busses, Utility, Trucking & Public Safety vehicles
- Industrial factory automation, robotic machinery and other M2M systems telemetry
- Farming & Agricultural automation such as M2M & IoT
- Broadband cellular distribution for Marine / Boats (inland and near coastal vessels)
- Mining Vehicles & Machinery communications, telemetry and automation (M2M & IoT)






Frequency Bands - Cellular

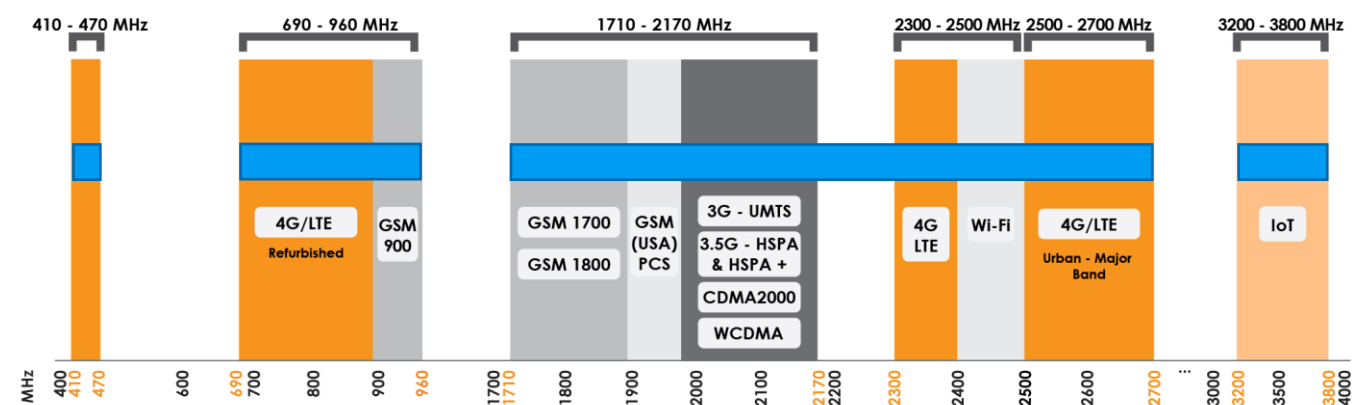The MIMO-3-V2-13 is suitable for the following frequency bands | 410-470 MHz | 690-960 MHz | 1710-2170 MHz | 2300-2500 MHz | 2500-2700 MHz | 3400-3800 MHz |



 Indicates the frequency bands which MIMO-3-V2-13 supports

Antenna Overview

			
Ports	1 & 2	N/A	3
SISO / MIMO	2x2 MIMO	N/A	N/A
Frequency Bands	410 MHz - 3800 MHz	N/A	1575.42 MHz/1600 MHz
Peak Gain	5.8 dBi	N/A	21 dBi
Coax Cable Type	Twin HDF-195	N/A	RTK-031
Coax Cable Length	2m	N/A	2m
Connector Type	SMA Male	N/A	SMA Male

MIMO-3-V2-13

©2018 Poynting Antennas (Pty) Ltd. All rights reserved
 Product Specifications may change without prior notice
 Revised: September 2018

Regulatory Compliance: RoHS 2011/65/EU Compliant | ISO 9001:2015
 Document version: TS-MIMO-0003-V2-13 REV2
www.poynting.tech

Electrical Specifications - Cellular

Frequency bands:	410-470 MHz 690-960 MHz 1710-2700 MHz 3400-3800 MHz
Gain (max) Port 1 & 2:	5.8 dBi
VSWR Port 1 & 2:	≤2.5:1
Feed power handling:	10 W
Input impedance:	50 Ohm (nominal)
Polarisation:	Linear Vertical
Coax cable loss:	0.35 dB/m @ 900 MHz 0.53 dB/m @ 2000 MHz 0.6 dB/m @ 2500 MHz 0.72 dB/m @ 3500 MHz
Path to Ground:	Yes

GPS/Glonass Antenna Electrical Specifications

Frequency Range (GPS):	1575.42MHz/1600MHz
Gain (Max):	21+/-2dBi
VSWR:	≤1.5:1
DC Voltage:	2.7-3.3 V
DC Current:	5-15mA
Noise Figure:	≤1.5 dB
Nominal Impedance:	50 Ω
Polarisation:	RHCP
Filter Out Band Attenuation:	12dB Min f0+50MHz, 16dBi Min f0-50MHz
Cable:	0.04m Micro Cable 1.13
Connector:	SMA male
Voltage:	2.7 - 3.3V
Max. Power-W:	50
Polarisation:	2 x Vertical linear
Coax cable loss:	0.6 dB/m @ 2500 MHz 0.72 dB/m @ 3500 MHz 0.981 dB/m @ 5800 MHz
Path to Ground:	Yes

Coax Cable & Connector Type -Cellular

Cable length:	2m
Coax cable type:	Twin HDF 195
Connector type:	SMA (Male)

Coax Cable & Connector Type - GPS

Cable length:	2m ±5%
Coax cable type:	RTK-031

Connector type: SMA (Male)

**The coax cables & connectors are factory mounted to the antenna*

Product Box Contents

Antenna:	A-MIMO-0003-V2-13
Mounting bracket:	Threaded Spigots (Up to 60mm clamping thickness), Adhesive Surface Mounting & Optional Magnetic Mount

Ordering Information

Commercial name:	MIMO-3-V2-13
Order product code:	A-MIMO-0003-V2-13
EAN number:	0707273470287


Mechanical Specifications

Product dimensions	253 mm x 128 mm x 144 mm
Packaged dimensions:	265 mm x 211 mm x 204 mm
Weight:	1.2 kg
Packaged weight:	1.31 kg
Radome material:	UV Stable SAN Marine ASA
Radome colour:	Brilliant White Pantone P 179-1 C
Mounting Type:	Spigot, Surface with Magnetic mount option


Environmental Specifications, Certification & Approvals

Wind Survival:	<220 km/h
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Outdoor/Indoor
Water ingress protection ratio/standard:	IP 68
Salt Spray:	MIL-STD 810F/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Flammability Rating:	UL 94-HB ECE-R118.02 Certified cables
Impact resistance:	IK 10
Product Safety & Environmental:	Complies with CE, EN, CSA, RoHS and IEC standards

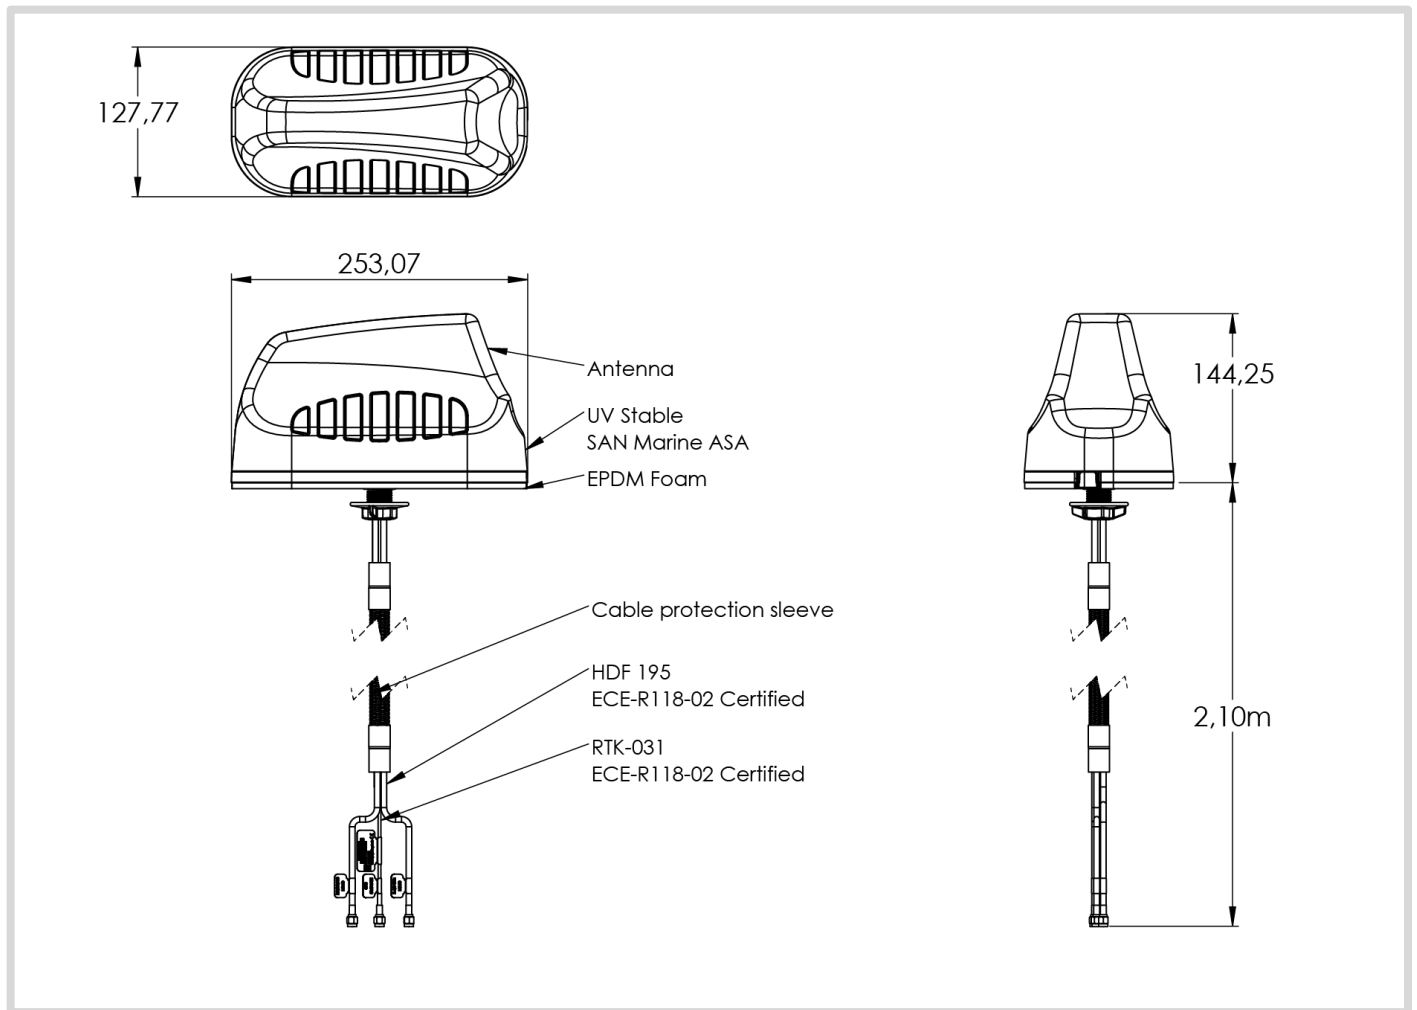


Technical Drawings


Antenna Performance Plots

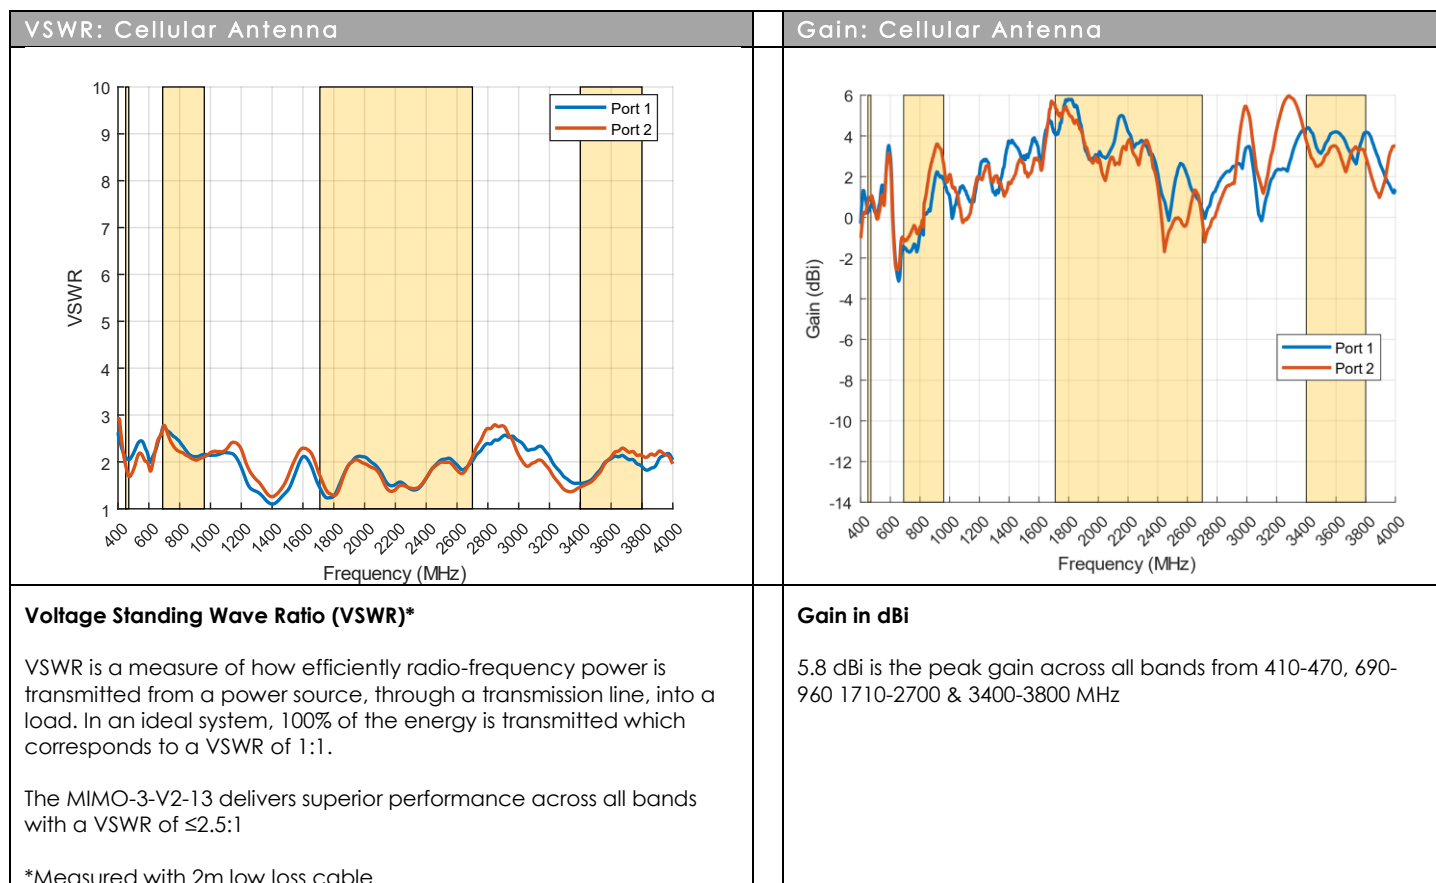


Radiation Patterns – Cellular

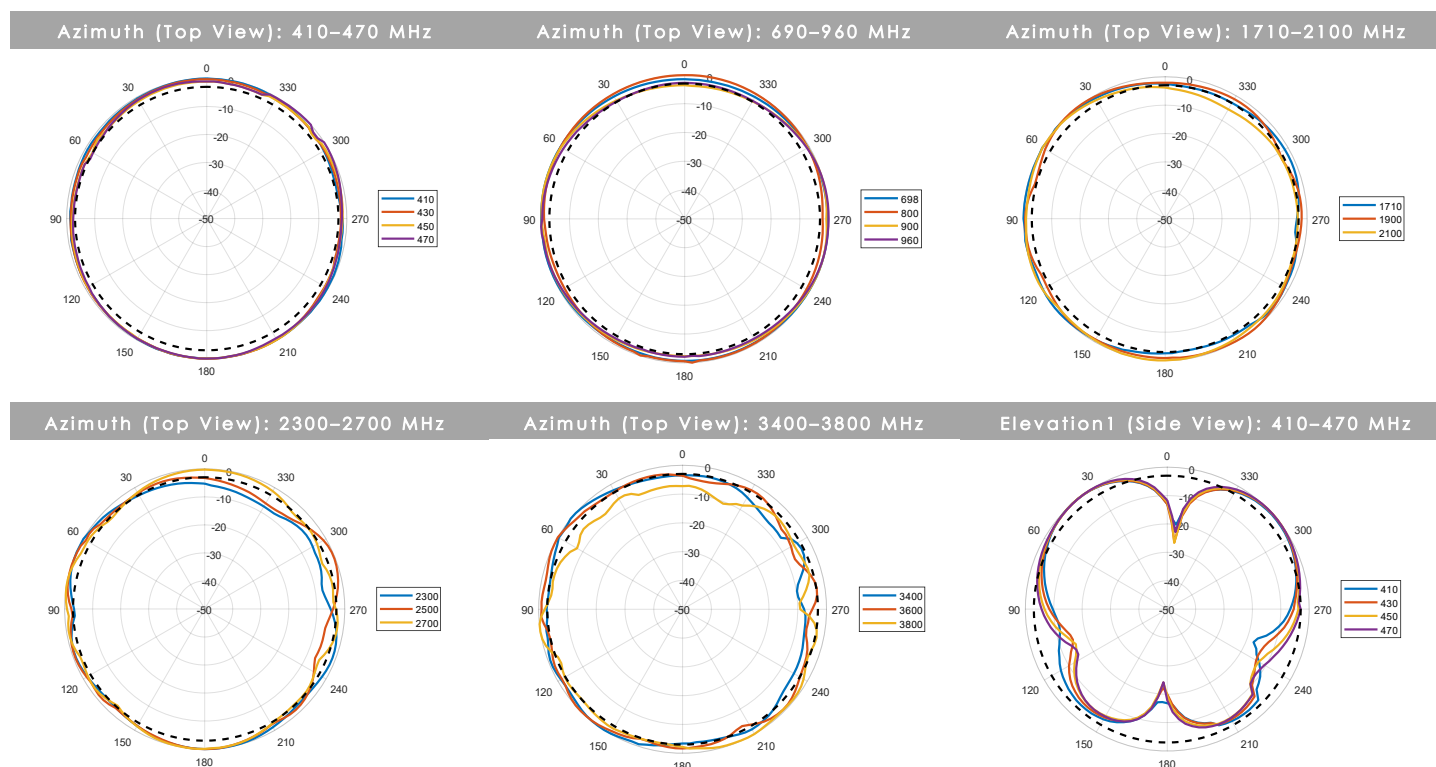


Elevation1 (Side View): 690–960 MHz

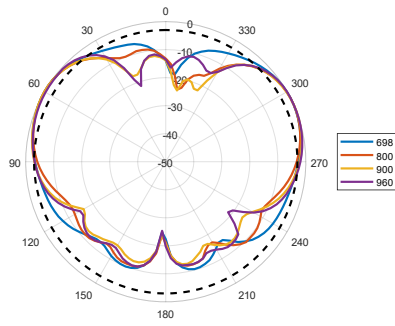


Elevation1 (Side View): 1710–2100 MHz

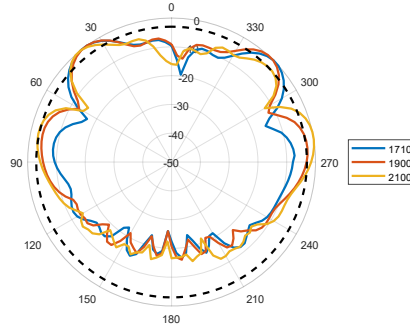


Elevation1 (Side View): 2300–2700 MHz

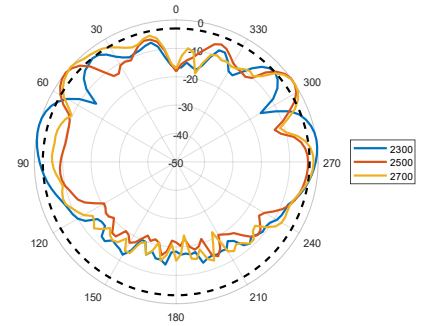


Elevation1 (Side View): 3400–3800 MHz

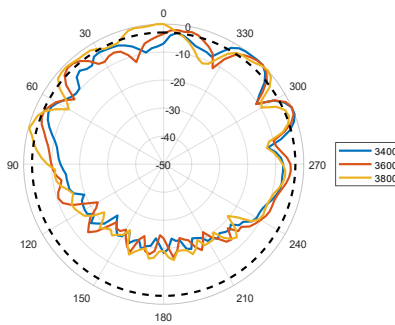


Elevation2 (Side View): 410–470 MHz

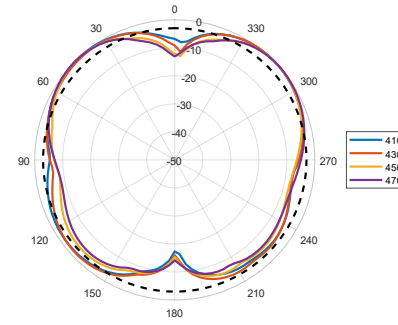


Elevation2 (Side View): 690–960 MHz

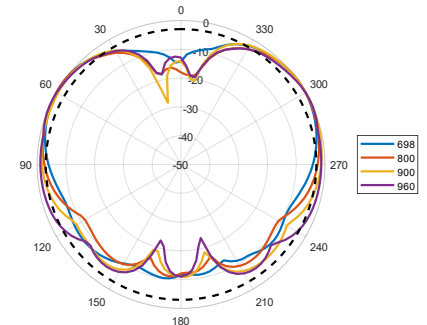


Elevation2 (Side View): 1710–2100 MHz

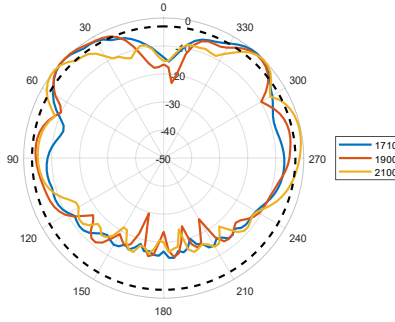

Elevation2 (Side View): 2300–2700 MHz

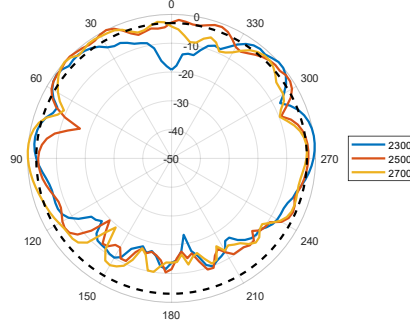


Elevation2 (Side View): 3400–3800 MHz

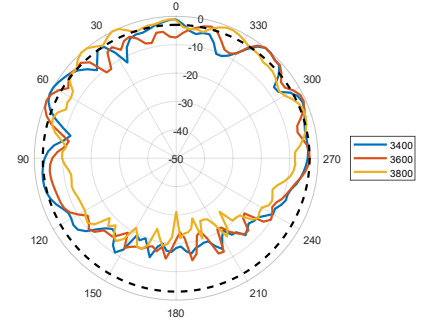


Radiation Patterns – GPS


XY Plane: 1561–1602 MHz

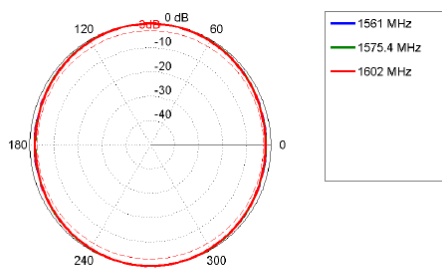

XZ Plane: 1561–1602 MHz

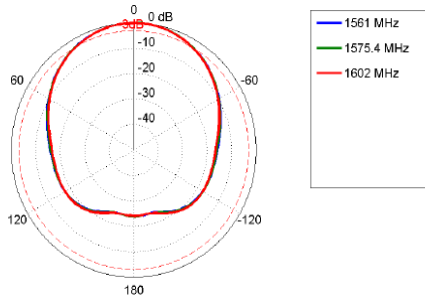


YZ Plane: 1561–1602 MHz

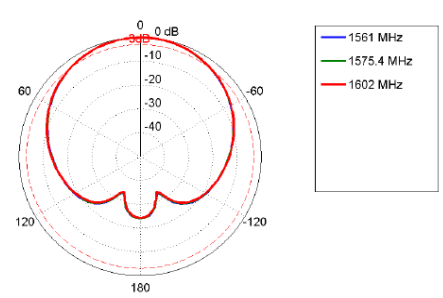

Mounting Options


Standard Spigot Mount

Threaded Spigot Mounting

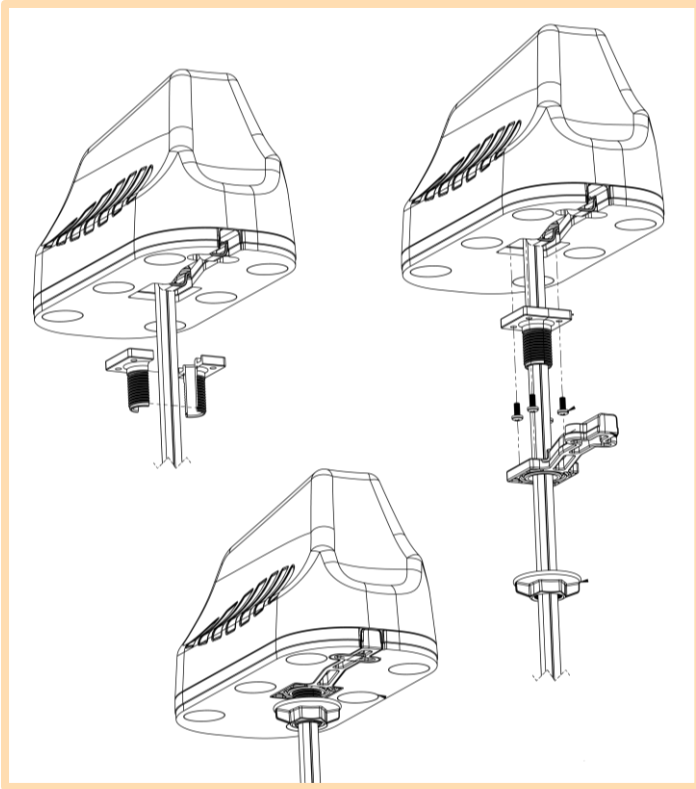


Surface Mount

Adhesive Surface Mounting

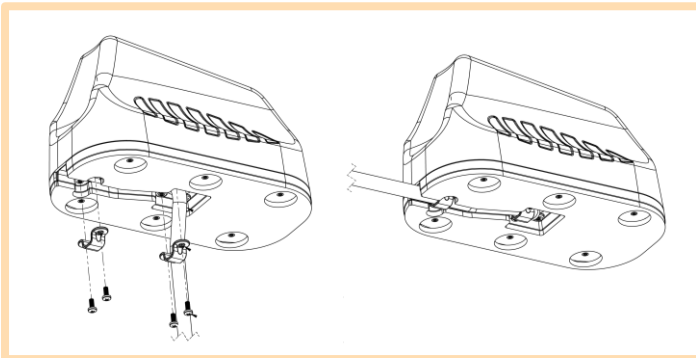

Magnetic Mount

Optional Magnetic Base Kit

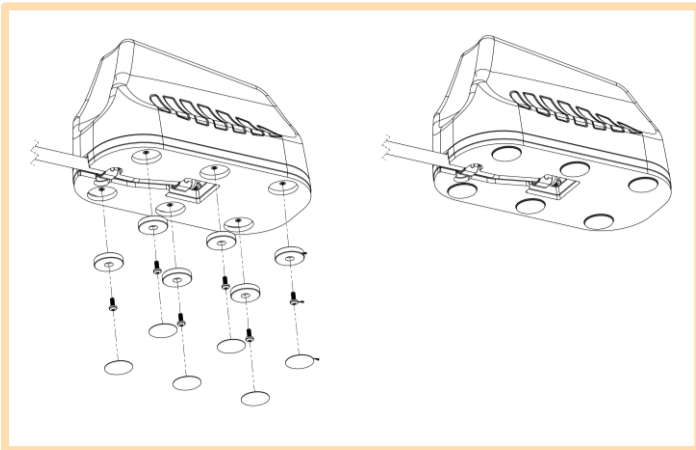

Additional Accessories



A-MBK-0001-V1.0

Magnetic Base Kit



Various Cable Extensions Available

Contact Poynting

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park
Landmarks Avenue,
Samrand, 0157
South Africa

Phone: +27 (0) 12 657 0050

E-mail: sales@poynting.co.za

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 208026538

E-mail: sales-europe@poynting.tech